



# DECOFLOC HX

Flocculation agent for the treatment of industrial wastewater prior to disposal into the sewerage system.



## INDUSTRIAL WASTEWATER TREATMENT RANGE

### PRODUCT TYPE

Liquid flocculation agent (organic polymer) in aqueous solution.


### ASPECT

- Colourless liquid
- Water solubility: 100%

### PHYSICOCHEMICAL DATA

- pH: 6.9
- Density: 1.001g/cm<sup>3</sup>

### OPERATING PRINCIPLE

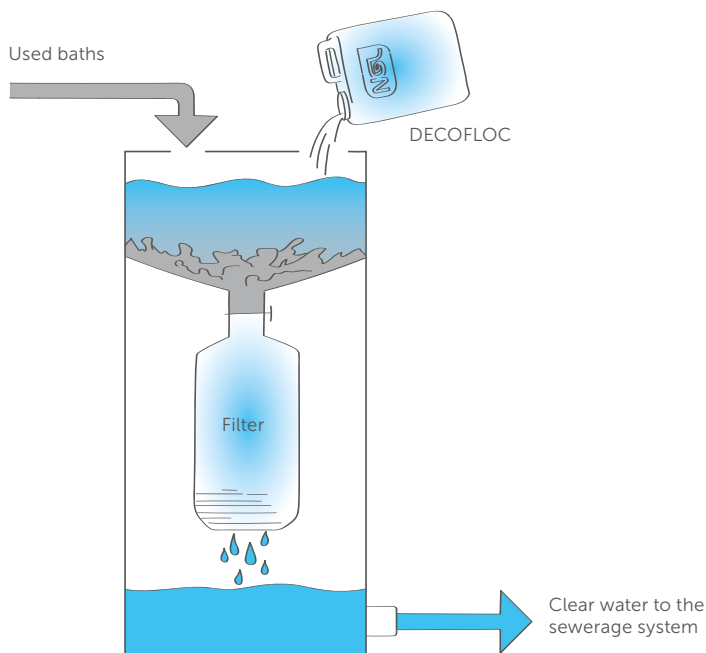

### BENEFITS

- Product ready to use, requires no flocculant preparation
- Acts instantly
- Forms thick sludge for better separation of impurities from treated water
- High concentration of flocculant, improved efficiency with lighter dosage

21/02/23


### INSTRUCTIONS FOR USE

- Dosage: 1-3l/m<sup>3</sup>

### STORAGE CONDITIONS

- Storage temperature between 5°C and 35°C (41°F and 95°F) in a dry place.
- Packaging in a can of 5l, 10l, 25l, drum of 200l

### PROCESS EXAMPLE

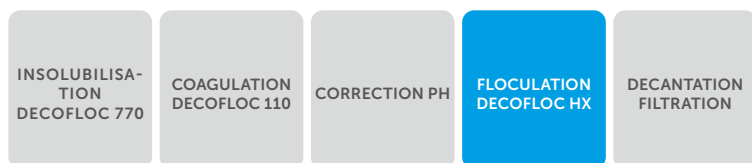

If you have any questions, please contact our NGL Water Technologies on: +41 22 365 46 66

