



# KORROSTOP 5000

Rinse additive for the protection of sensitive steel during cleaning and drying.



## WATCH INDUSTRY

FUNCTION	APPLICATION/POLLUTION
Rinse additive, protection against corrosion	Water

### COMPATIBILITY

- Tempered and sensitive steels:
  - 20AP, Finmac, Invar, H1, etc.

### COMPONENTS

- Anti-corrosion agents
- REACH compliant

### PHYSICOCHEMICAL DATA

- pH concentrated: 12.3
- Density: 0.98

### INSTRUCTIONS FOR USE\*

- Concentration: 0.02 to 0.1%
- Temperature: 20 to 30°C (68 to 86°F)
- Time: 1 to 3 minutes

\*Dependent on the quality of the water and the nature and quantity of contaminants.

### PROCESS EXAMPLES

- Cleaning of tempered steel parts

#### CLEANING


RODACLEAN 2018	TAP WATER RINSE	KORROSTOP 5000	DI WATER RINSE	HOT AIR DRYING
Tap water Conc.: 3-5% Temp.: 40-70°C 104-158°F Time: 2-5 min	Temp.: 20-30°C 68-86°F Time: 2-3 min	Tap water Conc.: 0.02-0.1% Temp.: 20-30°C 68-86°F Time: 1-3 min	Temp.: 20-30°C 68-86°F Time: 30 secs-1 min	
US		US		

- Oil removal of sensitive steel parts

#### CLEANING

DECOCLEAN 540	RODACLEAN 2018	TAP WATER RINSE	KORROSTOP 5000	HOT AIR DRYING
Oil separator Tap water Conc.: 1-5% Temp.: 50-70°C 122-158°F Time: 2-5 min	Tap water Conc.: 3-5% Temp.: 40-70°C 104-158°F Time: 2-5 min	Temp.: 20-30°C 68-86°F Time: 2-3 min	DI water Conc.: 0.02-0.1% Temp.: 20-30°C 68-86°F Time: 1-2 min	
US	US		US	

### HYDROPHOBIC FINISHING

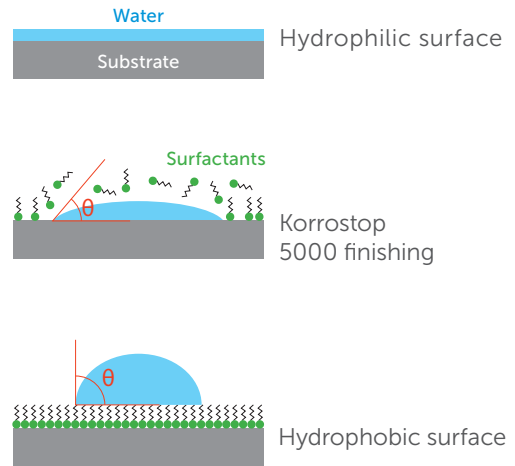

06/01/23

### STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

## NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 – CH-1260 NYON – SWITZERLAND  
+41 22 365 46 66 – contact@ngl-group.com – www.ngl-group.com

SWISS QUALITY

