



DECOSPRAY HT 8

Mild alkali detergent for the removal of neat oils and polishing compounds in spray or ultrasonic cleaning. Requires an oil separator.



METAL FINISHING RANGE

FUNCTION	APPLICATION/POLLUTION
Spray cleaning, oil removal in ultrasonic process with oil separator	Neat oil, polishing compounds

COMPATIBILITY

- Aluminium
- Titanium
- Ceramics
- Stainless steel:
 - Austenitic (303, 304, 316)
 - Martensitic (420, PH)

COMPONENTS

- Strong alkali, surfactants, chelating agents
- No CMR compounds, REACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: 8.5
- Density: 1.29
- Surface tension: 27.5 mN/m



INSTRUCTIONS FOR USE*

- Concentration: 2 to 4%
- Temperature: 40 to 50°C (104 to 122°F)
- Time: 2 to 3 minutes

*Dependent on the quality of the water and the nature and quantity of contaminants.

PROCESS EXAMPLES

- Removal of oils and polishing compounds in ultrasonic process

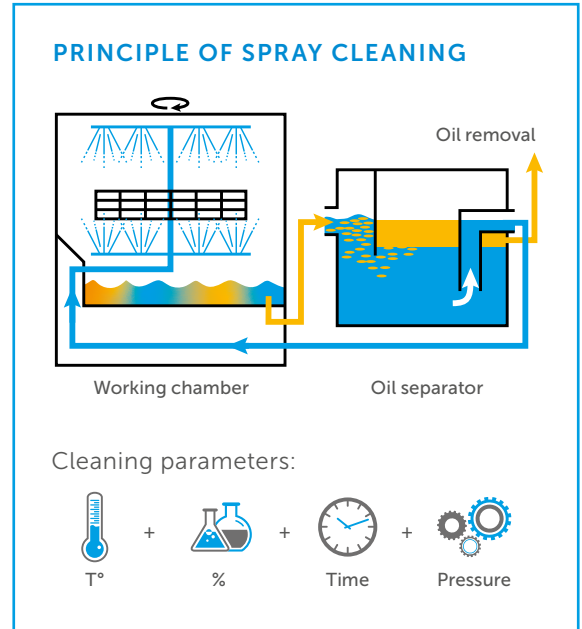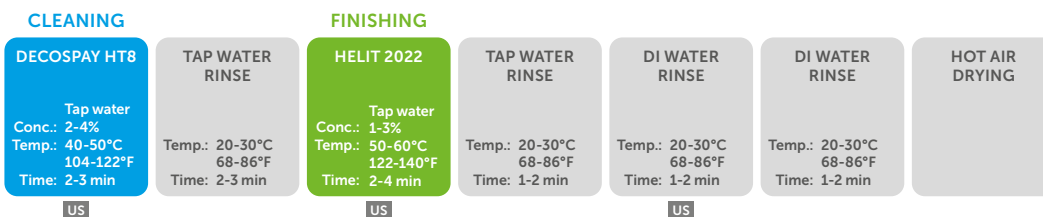

12/11/24

STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

